



禁止使用ROHS有害物质


标记	修改内容	用印	变更日期
△	修订TPT型号	LUO	2017-7-16
△			

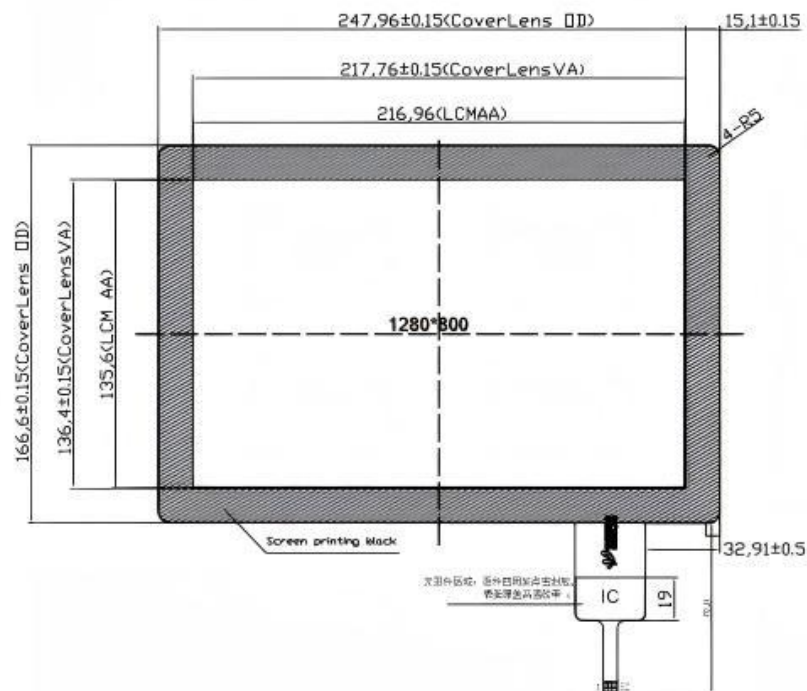

Front view

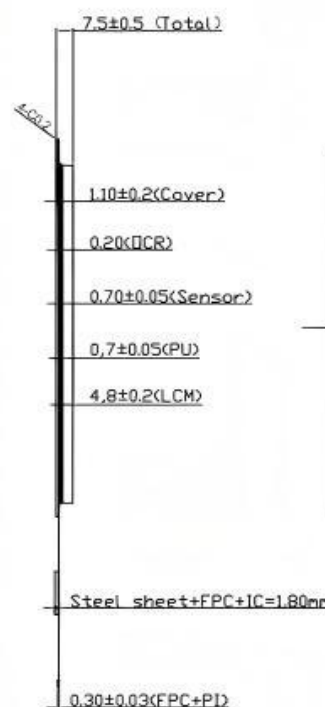

Side view

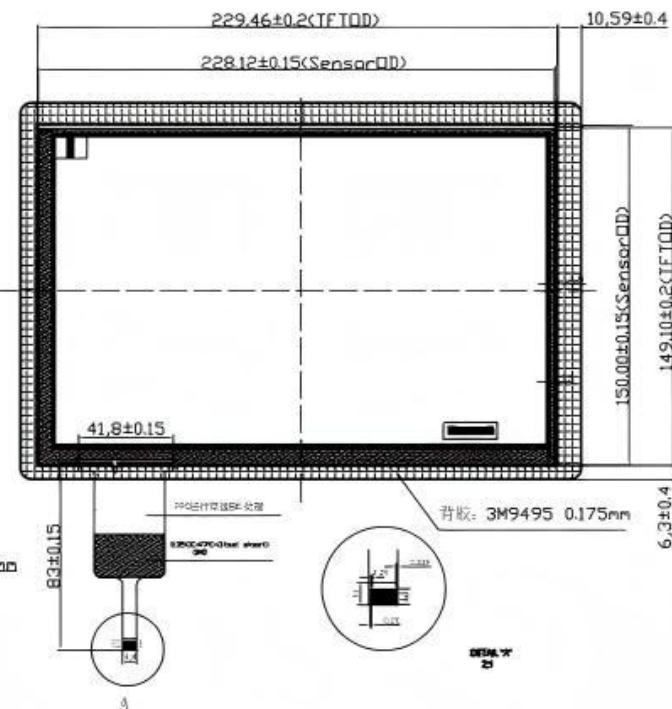

Back view

TP	PIN定义			
1	GND	5	swdio	9 RST3.3V
2	NC	6	GND	10 INT3.3V
3	NC	7	SDA3.3V	11 VDD3.3V
4	NC	8	SCL3.3V	12 VDD3.3V

技术参数			
1. 接口方式:	12C	8. 透过率:	$\geq 85\%$
2. 产品结构:	CAG	9. 表面硬度:	$\geq 6H$
3. I C 方案:	CYTA008	10. 工作环境:	$-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$, $\leq 85\%RH$
4. 测试制度:	CONTR. DCRDC-LCM+PI	11. 储存环境:	$-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$, $\leq 85\%RH$
5. 触控点数:	9点	12. LCM亮度:	450cd/m ²
6. 输入电压:	3.3V	13. 可视度:	80/00/00/00
7. 深度范围:	45-0.05mm	14. 未标注尺寸公差级:	± 0.15

TFT< HX1011A01D-40A> PIN																			
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Vcc	VDD	VDD	NC	NC	NC	GND	AVDD	AVDD	GND	AVDD	AVDD	GND	AVDD	AVDD	GND	AVDD	AVDD	GND	AVDD
21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
AVDD	GND	NC	NC	GND	NC	AVDD	AVDD	GND	LED+	LED+	NC	NC	VGL	NC	AVDD	VGH	LED+	LED+	LED+

		杭州宏泉科技有限公司					
		GraHowlet Technology CO., Ltd					
产品型号	HX1011702			视图方向		单位	mm
版本号	V2.0	设计	LD0	日期	2017-3-16	版次	A1
客户编号		核准	HBC	日期	2017-3-16	比例	1:1